

Absorbent Mesh Resin

Product Description

Microcement PRO Absorbent Mesh Resin is an aqueous acrylic polymer used as an adhesion promoter for absorbent surfaces before applying Microcement.

Properties

- Adhesion promoter for absorbent substrates.
- Applied with a roller or brush in one coat.
- Water-based; non-flammable.
- No plasticisers, solvents, ammonia or emulsifiers.
- Product supplied ready for use.

Amount needed

1 coat: 0.10 l/m²

Technical data

- Acrylic dispersion water-based
- White milky liquid
- Solids: 10.7 %
- PH: between 8 and 9
- Viscosity 10-11 s (Ford Cup 4)
- Density at 20°C: 1.01 ± 0.01 g/ml
- Application temperature: from 5 °C to 35 °C
- Dries to touch in 30 minutes

Application

The substrate should be dry, clean, firm and free of grease and oil. It is necessary to wait for at least 30 minutes and no more than 24 hours to apply the first layer of microcement.

Special precautions

If the product comes into contact with eyes, wash with plenty of water for 15 minutes.

In the event of contact with skin, wash with soap and water. Do not ingest. If swallowed, do not induce vomiting and seek medical assistance immediately.


It is recommended to comply with the following measures:

- Good ventilation.
- Safety glasses.
- Rubber gloves.

Empty containers must be disposed of in accordance with current local regulations. To prevent the product from drying or thickening, close the lid after each use. This product is not toxic, dangerous or flammable under normal conditions of handling. It does not contain any harmful substances that under current regulations call for any additional measures in terms of its labelling.

Keep out of the reach of children.

Microcement PRO

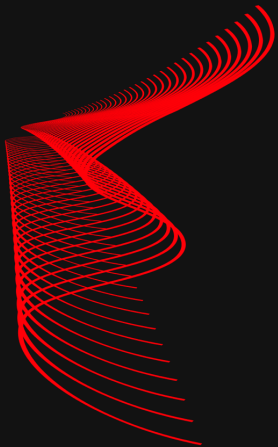

Microcement PRO
592 London Road
Isleworth
London
TW7 4EY

T. +44 (0) 207 754 0399
M. +44 (0) 730 511 3370
info@microcementpro.com

www.microcementpro.com

Packaging

Available in 5 litres plastic jerry cans.

Cleaning of tools

Tools should be cleaned with water and soap immediately after use.

Storage Conditions

The product should be stored in its closed original packaging, protected from weather conditions at temperatures between 10 °C and 30 °C in a dry and well ventilated place, away from direct heat and sunlight. Shelf life is 1 year from the date of production, if stored in well-preserved conditions.

The product should not be used for purposes other than those specified without first having instructions in writing. It is always the user's responsibility to take suitable measures in order to comply with the requirements established in local legislation. Product safety sheets are available for professionals. This technical data sheet will be valid until a new edition appears.

Last updated: August 2021