


EPOXY

Microcement PRO

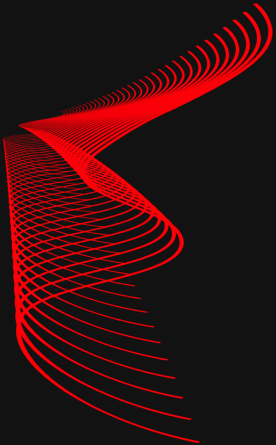

Microcement PRO
592 London Road
Isleworth
London
TW7 4EY

T. +44 (0) 207 754 0399

M. +44 (0) 204 552 4856

info@microcementpro.com

www.microcementpro.com

Microcement Mesh

Product Description

Microcement PRO fibreglass mesh is created with an especially thin, flat glass fabric. It is used to reinforce the base microcement and recommended to be used on all walls and floors which are to be completed in microcement.

Properties


- Flexible
- Easily Handled
- Non-Decaying
- Resistant

Recommendations for use

For both absorbent and non-absorbent substrates adhere Microcement PRO mesh with Microcement PRO mesh resin with the assistance of a roller and brush in corners. Microcement Mesh should then be covered with Base or Thick Base prior to subsequent sanding and installation layers.

Packaging Storage conditions

- Supplied in rolls of 50 x 1m (50m²)
- Microcement Mesh should be stored in its original container, closed and protected from weather conditions, vertically and in a dry place.

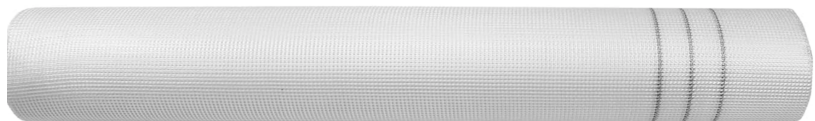

EPOXY

Microcement PRO

Technical Data UILTEX

	Builtex 50
Width	100 cm. $\pm$ 1%
Length	50 m
Weight	Glass 46gr./m ²
	Stiffening 4gr./m ²
Total weight	50 gr./m ²
Scrim size	1,35 x 3,20 mm
Thickness	0,14 mm. $\pm$ 15 %
Fabric	Flat
Stress resistance	Warp $\geq$ 850 N/5 cm.

Weft $\geq$ 400 N/5 cm Weft $\geq$ 700 N/5 cm Weft $\geq$ 1900 N/5 cm

Grupo Negocios PO, S.L.U.
ES-B97539076
Rosas 33, 46940 Manises - Spain
T. +34 963 925 989

info@topciment.com
www.topciment.com



The product should not be used for purposes other than those specified without first having instructions in writing. It is always the user's responsibility to take suitable measures in order to comply with the requirements established in local legislation. Product safety sheets are available for professionals. This technical data sheet will be valid until a new edition appears.

Last updated: October 2023

Microcement PRO
592 London Road
Isleworth
London
TW7 4EY

T. +44 (0) 207 754 0399

M. +44 (0) 204 552 4856

info@microcementpro.com

www.microcementpro.com